

HSR-0025RT



HSR-0025RT

Micro Reed Switch

Electrical Characteristics		@ 25 °C
Contact form		A
Contact material		Rh
Contact rating max.	W / VA	0.25
Switching voltage max.	VDC	30
	VAC	20
Switching current max.	A	0.01
Carry current max.	A	0.7
Breakdown voltage min.	VDC	80
Contact resistance max. (initial)	mΩ	750
Insulation resistance min.	Ω	10 ¹¹

Features
<ul style="list-style-type: none"> ➤ World´s smallest Reed Switch! ➤ Micro Reed Switch with 4 mm glass length ➤ Smallest size for applications in medical devices ➤ Various sensitivity ranges available

Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	4 - 15
Drop out min.	AT	1
Test coil	TC	091
Test equipment tolerance	± AT	1


Approvals
 

Operating Characteristics		@ 25 °C
Switching frequency max.	Hz	900
Resonant frequency typ.	Hz	10000
Operate time max. (incl. bounce)	ms	0.3
Release time max.	ms	0.2

Environmental Characteristics	
Operating temperature	°C -40 to + 125
Vibration (50-2000 Hz)	g 15
Shock (1/2 sin 11 ms)	g 75

Life Expectancy			
Resistive load	Voltage	Current	Operations
	5 VDC	0,01 A	1 x 10 ⁻⁷
	10 VDC	0,1 A	5 x 10 ⁻⁵

Ordering Information	
Packing Unit	100 pcs
Weight per piece	0.017 g
Weight per package	12 g
Standard AT ranges	
	4 to 8 AT
	5 to 10 AT
	10 to 15 AT

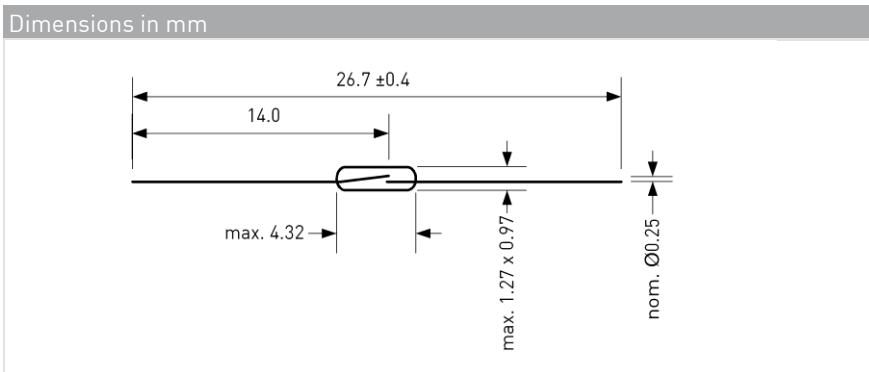

Ordering example
 HSR0025RT1015 describes HSR-0025RT with 10 to 15 AT.