


HSR-0025TSM

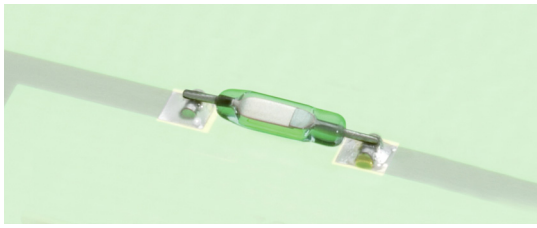

**HSR-0025TSM**

Micro SMD Reed Switch

**Electrical Characteristics** @ 25 °C

Contact form		A
Contact material		Rh
Contact rating max.	W / VA	0.25
Switching voltage max.	VDC	30
	VAC	20
Switching current max.	A	0.01
Carry current max.	A	0.7
Breakdown voltage min.	VDC	80
Contact resistance max. (initial)	mΩ	1000
Insulation resistance min.	Ω	10 <sup>11</sup>

**Magnetical Characteristics (of unmodified Reed Switch)** @ 25 °C

Pull in range available	AT	5 - 15
Drop out min.	AT	1
Test coil	TC	091
Test equipment tolerance	± AT	1

**Operating Characteristics** @ 25 °C

Switching frequency max.	Hz	900
Resonant frequency typ.	Hz	10000
Operate time max. (incl. bounce)	ms	0.3
Release time max.	ms	0.2

**Environmental Characteristics**

Operating temperature	°C	-40 to +125
Storage temperature	°C	-40 to +200
Vibration (50-2000 Hz)	g	15
Shock (1/2 sin 11 ms)	g	75

**Features**


- World 's smallest SMD Reed Switch
- Ultra miniature size
- Minimum height above PCB
- Suitable for lead-free soldering
- Suitable for automated assembly
- Tape & reel packaging upon request
- Various sensitivity ranges available

**Approvals**

RoHS

REACH

**Dimensions in mm**

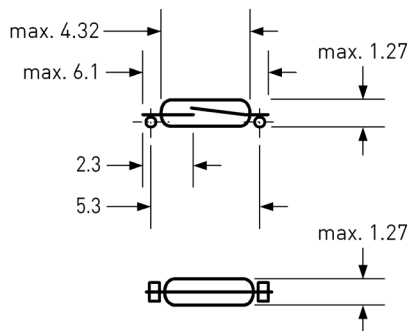

Position of contact blades not defined.


**Ordering Information**

Packing Unit	200 pcs
Weight per piece	0.01 g
Weight per package	14 g
Standard AT ranges	5 to 10 AT 10 to 15 AT

**Ordering example**


HSR-0025TSM510 describes HSR-0025TSM with 5 to 10 AT.

HSR-0025TSM

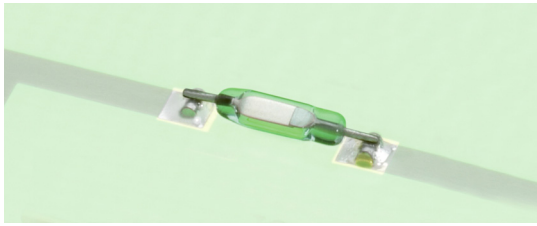


**HSR-0025TSM**  
Micro SMD Reed Switch

Recommended PCB Layout in mm



Pad sizes



Final assembly position



Remarks

When placed onto ferromagnetic parts switching distance of HSR-0025TSM may reduce.

Electromagnetical influences and magnetic fields may change the switching behaviour of the SMD Reed Switch.