

## MS-313-3



## MS-313-3

World's smallest Reed Sensor Flatpack

### Electrical Characteristics @ 25 °C

Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	150
	VAC	120
Switching current max.	A	0.5
Carry current max.	A	0.7
Breakdown voltage min.	VDC	200
Total resistance max. (initial)	mΩ	400
Insulation resistance min.	Ω	10 <sup>9</sup>

### Features

- Adjustable switching point
- Customized types available
- Various sensitivity ranges available

### Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	10 - 20
Drop out min.	AT	4
Test coil	TC	010
Test equipment tolerance	± AT	2

### Approvals

RoHS

REACH


### Operating Characteristics (of unmodified Reed Switch) @ 25 °C

Switching frequency max.	Hz	600
Resonant frequency typ.	Hz	12000
Operate time max. (incl. bounce)	ms	0.3
Release time max.	ms	0.1

### Environmental Characteristics

Operating temperature	°C	-20 to +85
Vibration (50-2000 Hz)	g	10
Shock (1/2 sin 11 ms)	g	50

### Dimensions in mm

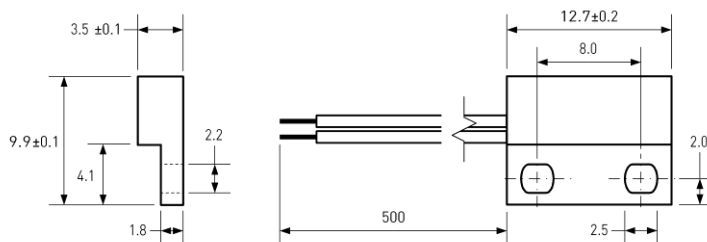

### Ordering Information

Packing Unit	50 pcs
Weight per piece	3.8 g
Weight per package	205 g
Standard AT Ranges	

1 = 10 to 15 AT

2 = 15 to 20 AT

### Ordering Example

MS-313-3-2-0500 describes MS-313-3 with 15 to 20 AT.

MS-313-3




**MS-313-3**

World's smallest Reed Sensor Flatpack


Material Information

	Material	Colour
Housing	ABS	black
Potting compound	Epoxy	black
Cable	UL 1007/1569, AWG 26, 4 mm stripped and tinned	black

Test Procedure of final Reed Sensor

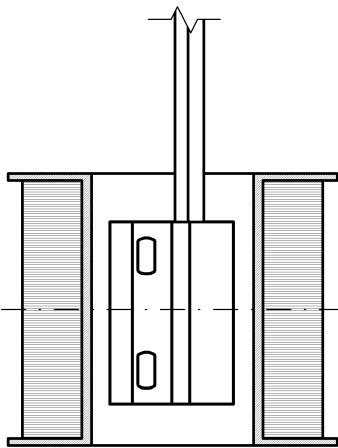

Test Coil placed in vertical position



Reed Sensor diagonally centered in Test Coil

Test Parameters

Test coil	TC- 320
Test programs	
AT range	Test program
1 =	MS-313-3-1
2 =	MS-313-3-2

Remarks

When mounted onto ferromagnetic parts switching distance of MS-313-3 may reduce.  
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Only non-ferromagnetic screws to be used for mounting.

Matching actuator MSM-313 available as well.