

## MS-324-4



## MS-324-4

Form C Reed Sensor Flatpack

### Electrical Characteristics @ 25 °C

Contact form		C
Contact rating max.	W / VA	5
Switching voltage max.	VDC	175
	VAC	120
Switching current max.	A	0.25
Carry current max.	A	1.5
Breakdown voltage min.	VDC	200
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 <sup>9</sup>

### Features

- Compact size
- Adjustable switching point
- Various sensitivity ranges available
- Customized types available

### Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	15 - 30
Drop out min.	AT	5
Test coil	TC	200
Test equipment tolerance	± AT	2

### Approvals

RoHS

REACH




### Operating Characteristics (of unmodified Reed Switch) @ 25 °C

Switching frequency max.	Hz	100
Resonant frequency typ.	Hz	1100
Operate time max. (incl. bounce)	ms	0.7
Release time max.	ms	1

### Environmental Characteristics

Operating temperature	°C	-20 to +85
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	50

### Dimensions in mm

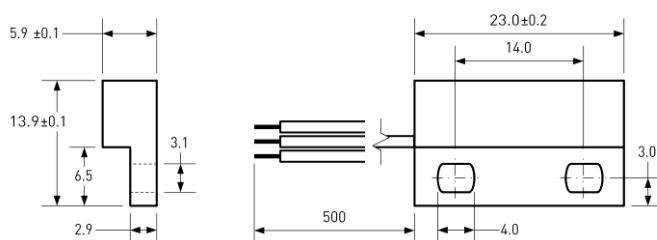

### Ordering Information

Packing Unit	50 pcs
Weight per piece	5.3 g
Weight per package	270 g
Standard AT Ranges	
	2 = 15 to 20 AT
	3 = 20 to 25 AT
	4 = 25 to 30 AT

### Ordering Example

MS-324-4-2 describes MS-324-4 with 15 to 20 AT.

MS-324-4





**MS-324-4**

Form C Reed Sensor Flatpack

Material Information

	Material	Colour
Housing	ABS	black
Cable	UL 1007/1569, AWG 26, 4 mm stripped and tinned	COM: black, NO: grey, NC: white
Potting compound	Epoxy	black

Test Procedure of final Reed Sensor

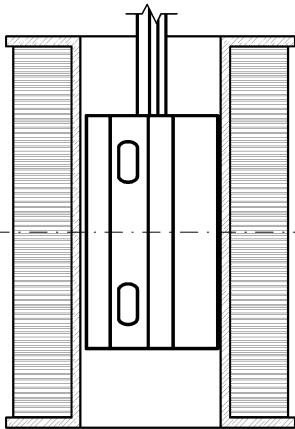

- Test Coil placed in vertical position
- Reed Sensor aligns with bottom line
- Reed Sensor pushed into opposite corner of Test Coil

Test Parameters

Test coil	TC- 324
Test programs	
AT range	Test program
2 =	MS-324-4-2
3 =	MS-324-4-3
4 =	MS-324-4-4

Remarks

When mounted onto ferromagnetic parts switching distance of MS-324-4 may reduce.  
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Only non-ferromagnetic screws to be used for mounting.

Matching actuator MSM-324 available as well.