


PMC-1401Z

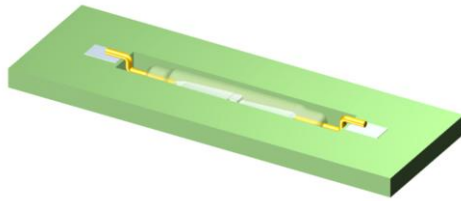

PMC-1401Z

Standard SMD Reed Switch

Electrical Characteristics @ 25 °C

Contact form		A
Contact material		Ru
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	1
Carry current max.	A	1.2
Breakdown voltage min.	VDC	240
Contact resistance max. (initial)	mΩ	150
Insulation resistance min.	Ω	10 ¹⁰

Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	10 - 25
Drop out min.	AT	4
Test coil	TC	014
Test equipment tolerance	± AT	2

Operating Characteristics @ 25 °C

Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	4000
Operate time max. (incl. bounce)	ms	1
Release time max.	ms	0.4

Environmental Characteristics

Operating temperature	°C	-60 to +155
Storage temperature	°C	-60 to +155
Soldering temperature max.	°C	300
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	100
Lead tensile strength min.	kg	4

Features


- Small size
- Minimum height above PCB
- Perfect economical alternative to Hall switches
- Replaces various competitors types
- Over 1 billion reliable operations at dry circuits or low level loads
- Suitable for lead-free soldering
- Tape & reel packaging

Approvals

RoHS

REACH

Dimensions in mm

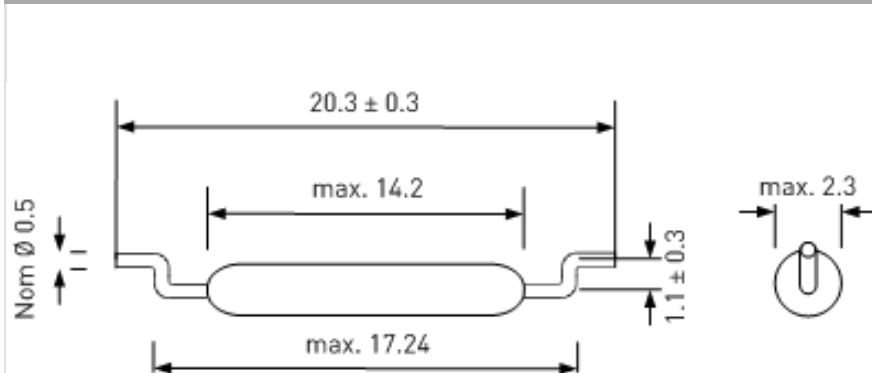

Position of contact blades not defined.

Ordering Information

Packing Unit	5000 pcs
Weight per piece	0.1 g
Weight per package	1200 g
Reel size	13 inches


Standard AT ranges

10 to 15 AT
15 to 20 AT
20 to 25 AT

Ordering example


PMC1401Z1520 describes
PMC-1401Z with 15-20 AT

PMC-1401Z

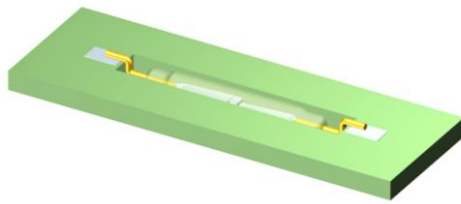


PMC-1401Z
Standard SMD Reed Switch

Recommended PCB Layout in mm

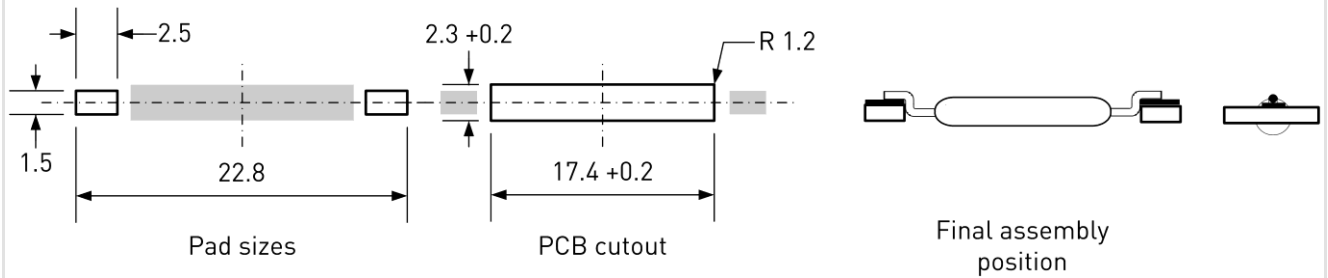


Soldering Information

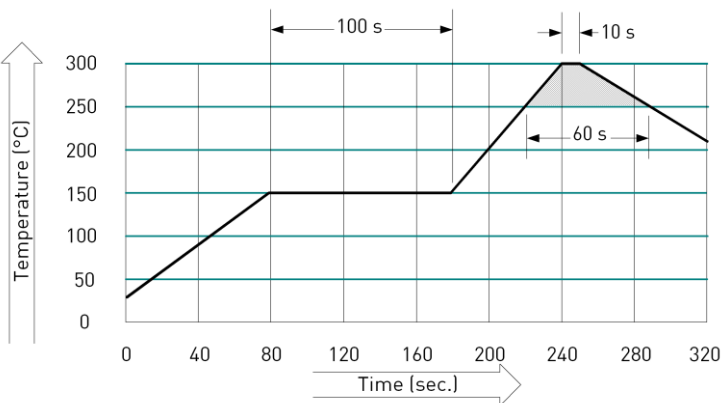


Mounting Force

Recommended Mounting Force	3 N
Maximum Mounting Force	8 N

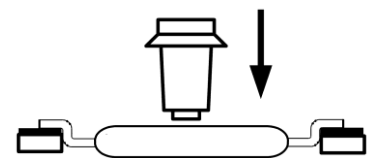

Tape Dimensions in mm

Tolerance ± 0.1 unless otherwise specified

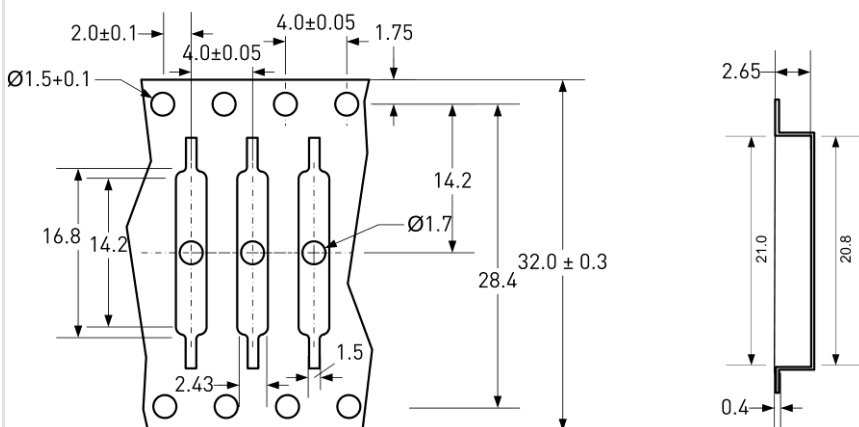

Remarks

When placed onto ferromagnetic parts switching distance of PMC-1401Z may reduce.

Electromagnetical influences and magnetic fields may change the switching behaviour of the SMD Reed Switch.