


## PRX+2463

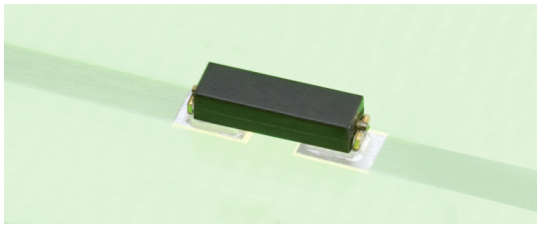

## PRX+2463

Ultraminiature SMD Reed Switch

### Electrical Characteristics @ 25 °C

Contact form		A
Contact material		Rh
Contact rating max.	W / VA	0.5
Switching voltage max.	VDC	30
	VAC	20
Switching current max.	A	0.01
Carry current max.	A	0.7
Breakdown voltage min.	VDC	80
Contact resistance max. (initial)	mΩ	1000
Insulation resistance min.	Ω	10 <sup>11</sup>

### Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	5 - 15
Drop out min.	AT	1
Test coil	TC	091
Test equipment tolerance	± AT	1

### Operating Characteristics @ 25 °C

Switching frequency max.	Hz	900
Resonant frequency typ.	Hz	10000
Operate time max. (incl. bounce)	ms	0.3
Release time max.	ms	0.2

### Environmental Characteristics

Operating temperature	°C	-40 to +125
Storage temperature	°C	-40 to +200
Vibration (50-2000 Hz)	g	15
Shock (1/2 sin 11 ms)	g	75

### Features


- Ultra miniature size
- Suitable for automated assembly
- Suitable for lead-free soldering
- Not ESD sensitive
- Tape & reel packaging upon request
- Various sensitivity ranges available
- Minimum height above PCB

### Approvals

RoHS

REACH

### Dimensions in mm

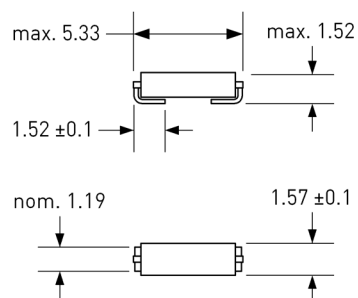

### Ordering Information


Packing Unit	200 pcs
Weight per piece	0.02 g
Weight per package	16 g
Standard AT ranges	

5 to 15 AT  
10 to 15 AT

### Ordering example


PRX+2463510 describes  
PRX+2463 with 5 to 10 AT

PRX+2463

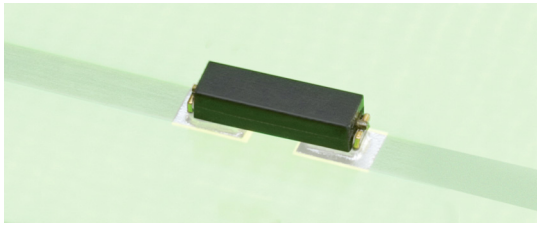

**PRX+2463**  
Ultraminiature SMD Reed  
Switch

Recommended PCB Layout in mm



Pad sizes



Final assembly position

Remarks

When placed onto ferromagnetic parts  
switching distance of PRX+2463  
may reduce.

Electromagnetical influences and magnetic fields  
may change the switching behaviour  
of the SMD Reed Switch.